

Compact filtered power entry module



- Rated currents up to 10A
- Single or dual-fuse holder
- Fuses Ø5 x 20mm
- 2-pole rocker switch
- General purpose application
- Optional earth line choke (E type)
- Optional medical versions (B type)

Approvals



(CQC except HI-types)

RoHS

Technical specifications

| | |
|--|--|
| Maximum continuous operating voltage: | 250V, 50/60Hz |
| Operating frequency: | 50 to 400 Hz |
| Rated currents: | 1 to 10 A @ 40°C max. |
| High potential test voltage: | P → PE 2000VAC for 2 sec (standard types) P → PE 2500VAC for 2 sec (B types) P → N 760VAC for 2 sec |
| Protection category: | IP40 according to IEC 60529 |
| Temperature range (operation and storage): | -25 °C to +85 °C (25/85/21) |
| Design corresponding to: | UL 1283, CSA 22.2 No. 8 1986, IEC/EN 60939 |
| Flammability corresponding to: | UL 94V-2 or better |
| MTBF @ 40 °C/230V (Mil-HB-217F): | 1,500,000 hours |
| Fuse holder: | 1 or 2 fuses (Ø5 x 20mm) |
| Marking: | max. 250V ~ (text is print. below fuse symbol) |
| Rocker switch description: | |
| Function: | 2-pole, dark not illuminated |
| Electrical specifications: | Marking I - 0 Inrush current 82A 6,000 on-off operations according to UL 1054, TV5 10,000 on-off operations according to ENEC |
| Mechanical life:: | 50,000 cycles |
| Switch ratings: | |
| USA (UL) and Canada (C-UL): | 10A, 125VAC; 10A, 250VAC; 1/3HP |
| Europe (ENEC): | 10A (4A), 250VAC* |
| Operating frequency: | 50 to 400 Hz |


* Value in () relates to the inductive current charge: $\cos\phi = 0.65$

The FN 280 power entry module combines an IEC inlet, a mains filter with single or dual-fuse holder and a 2-pole rocker switch in a small form factor. Choosing FN 280 product line brings you the rapid availability of a standard filter associated with the necessary safety acceptances. Standard IEC connector filters are a practical solution helping you to pass EMI system approval in a short time. A wide selection on amperage ratings, fuse options, mounting possibilities and filters for medical applications are designed to offer you the desired solution.


Features and benefits

- High conducted attenuation performance, based on chokes with high saturation resistance and excellent thermal behavior.
- Rear/front or snap-in mounting.
- Single or dual-fuse holder.
- 2-pole rocker switch.
- Custom-specific versions are available on request.

Typical electrical schematic

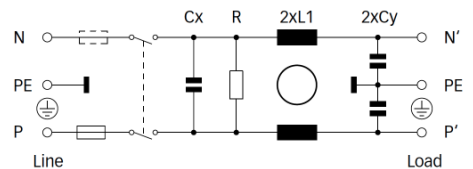

E types

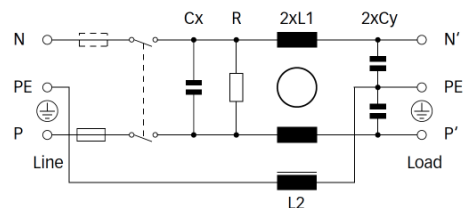

Typical applications

- Portable electrical and electronic equipment
- Consumer goods
- EDP and office equipment
- Single-phase power supplies, switch-mode power supplies
- Test and measurement equipment
- Medical equipment

Filter selection table


| Filter | Rated current @ 40 °C (25 °C) [A] | Leakage current** @ 230VAC/50Hz [µA] | Inductance | | Capacitance | | Resistance R [kΩ] | Output connections | Fuses** [Qty] | Weight [g] |
|---------------|---|--|------------|------------|-------------|------------|-------------------------|-----------------------|------------------|---------------|
| | | | L1 [mH] | L2 [mH] | Cx [nF] | Cy [nF] | | | | |
| FN 281-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 281-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 281-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 281-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 281-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 282-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 282-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 282-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 282-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 282-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 2 | 140 |
| FN 283-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 284-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 2 | 140 |
| FN 285-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 285-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 285-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 285-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 285-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 286-1-06 | 1 (1.2) | 373 | 7.5 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 286-2-06 | 2 (2.4) | 373 | 2 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 286-4-06 | 4 (4.8) | 373 | 1 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 286-6-06 | 6 (7.2) | 373 | 0.45 | | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 286-10-06 | 10 (11.6) | 373 | 0.34 | | 220 | 2.2 | 1000 | -06 | 2 | 140 |
| FN 283E-1-06 | 1 (1.2) | 373 | 7.5 | 0.4 | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283E-2-06 | 2 (2.4) | 373 | 2 | 0.4 | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283E-4-06 | 4 (4.8) | 373 | 1 | 0.4 | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 283E-6-06 | 6 (7.2) | 373 | 0.45 | 0.4 | 220 | 2.2 | 1000 | -06 | 1 | 140 |
| FN 284E-1-06 | 1 (1.2) | 373 | 7.5 | 0.4 | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284E-2-06 | 2 (2.4) | 373 | 2 | 0.4 | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284E-4-06 | 4 (4.8) | 373 | 1 | 0.4 | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 284E-6-06 | 6 (7.2) | 373 | 0.45 | 0.4 | 220 | 2.2 | 1000 | -06 | 2 | 90 |
| FN 282B-1-06 | 1 (1.2) | 2 | 7.5 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 282B-2-06 | 2 (2.4) | 2 | 2 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 282B-4-06 | 4 (4.8) | 2 | 1 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 282B-6-06 | 6 (7.2) | 2 | 0.45 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 282B-10-06 | 10 (11.6) | 2 | 0.34 | | 220 | | 1000 | -06 | 2 | 140 |
| FN 284B-1-06 | 1 (1.2) | 2 | 7.5 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 284B-2-06 | 2 (2.4) | 2 | 2 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 284B-4-06 | 4 (4.8) | 2 | 1 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 284B-6-06 | 6 (7.2) | 2 | 0.45 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 284B-10-06 | 10 (11.6) | 2 | 0.34 | | 220 | | 1000 | -06 | 2 | 140 |
| FN 286B-1-06 | 1 (1.2) | 2 | 7.5 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 286B-2-06 | 2 (2.4) | 2 | 2 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 286B-4-06 | 4 (4.8) | 2 | 1 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 286B-6-06 | 6 (7.2) | 2 | 0.45 | | 220 | | 1000 | -06 | 2 | 90 |
| FN 286B-10-06 | 10 (11.6) | 2 | 0.34 | | 220 | | 1000 | -06 | 2 | 140 |

* Maximum leakage under normal operating conditions. Note: if the neutral line is interrupted, worst case leakage could reach twice this level.


** Filters are delivered without fuse.

Mechanical data


FN 281 / FN 282

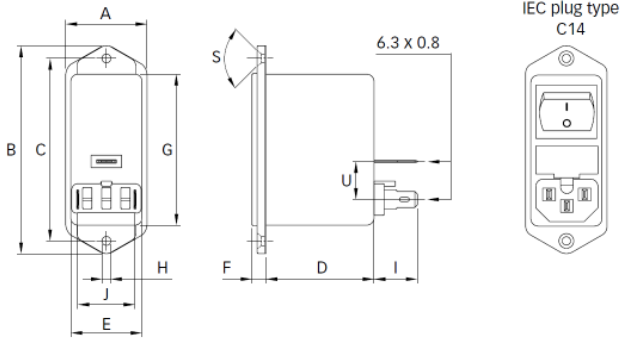


FN 283 / FN 284

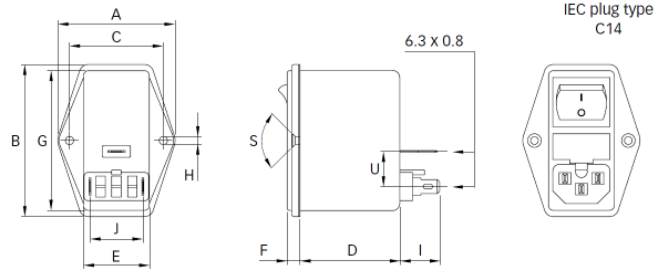

FN 285 / FN 286

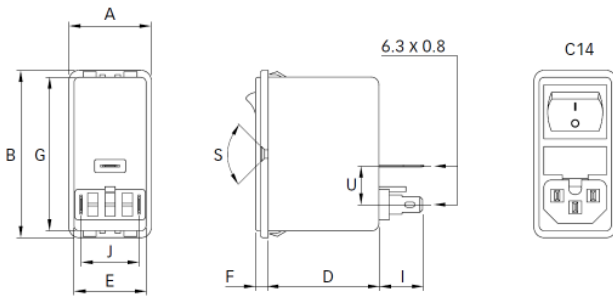

Panel cut out

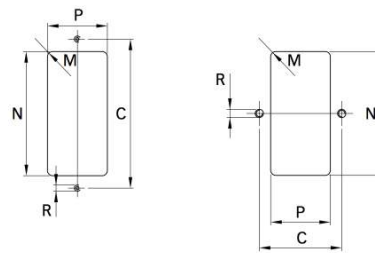

Dimensions

| | FN 281 | FN 282 | FN 283 | FN 284 | FN 285 | FN 286 | Tolerances |
|---|------------|------------|------------|------------|--------------|--------------|------------|
| A | 32 | 32 | 50 | 50 | 32 | 32 | ±0.3 |
| B | 82 | 82 | 65 | 65 | 65 | 65 | ±0.3 |
| C | 72 | 72 | 40 | 40 | | | ±0.1 |
| D | 43.1 | 43.1 | 43.1 | 43.1 | 43.6 | 43.6 | ±0.3 |
| E | 28.5 | 28.5 | 28.5 | 28.5 | 28.5 | 28.5 | ±0.25 |
| F | 5.5 | 5.5 | 5.5 | 5.5 | 5 | 5 | ±0.3 |
| G | 59.95 max. | 59.95 max. | 59.95 max. | 59.95 max. | 59.95 max. | 59.95 max. | |
| H | Ø3.5 | Ø3.5 | Ø3.3 | Ø3.3 | | | |
| I | 13.4 | 16.2 | 13.4 | 16.2 | 13.9 | 16.7 | ±0.3 |
| J | 22.5 | 22.5 | 22.5 | 22.5 | 22.5 | 22.5 | |
| M | R ≤ 2.5 | R ≤ 2.5 | R ≤ 2.5 | R ≤ 2.5 | R ≤ 2.5 | R ≤ 2.5 | |
| N | 60 | 60 | 60 | 60 | 61.5+0.2/-0* | 61.5+0.2/-0* | +0.5/-0 |
| P | 29 | 29 | 29 | 29 | 29 | 29 | +0.5/-0 |
| R | M3 | M3 | M3 | M3 | | | |
| S | 90° | 90° | 90° | 90° | | | |

* For a panel thickness between 0.8 and 3mm

All dimensions in mm; 1 inch = 25.4mm
Tolerances according: ISO 2768-m / EN 22768-m

**Headquarters, global innovation
and development center**

Schaffner Group

Nordstrasse 11
4542 Luterbach
Switzerland
T +41 32 681 66 26
F +41 32 681 66 30
info@schaffner.com
www.schaffner.com

To find your local partner within
Schaffner's global network, please go
to www.schaffner.com

© 2012 Schaffner Group
Specifications are subject to change
without notice. The latest version of the
data sheets can be obtained from the
website. All trademarks recognized.

Schaffner is an ISO-registered
company.

Its products are designed and
manufactured under the strict quality
and environmental requirements of
the ISO 9001 and ISO 14001
standards.

This document has been carefully
checked. However, Schaffner does not
assume any liability for errors or
inaccuracies.

Sales and application centers

China

Schaffner EMC Ltd. Shanghai
T20-3, No 565 Chuangye Road
Pudong New Area
201201 Shanghai
T +86 21 3813 9500
F F +86 21 3813 9501 / 02
cschina@schaffner.com
<http://www.schaffner.com.cn/>

Finland

Schaffner Oy
Sauvonrinne 19 H
08500 Lohja
T +358 19 35 72 71
finlandsales@schaffner.com

France

Schaffner EMC S.A.S.
112, Quai de Bezons
Boîte postale 133
95103 Argenteuil
T +33 1 34 34 30 60
F +33 1 39 47 02 28
francesales@schaffner.com

Germany

Schaffner Deutschland GmbH
Westring 18
33142 Büren
T +49 2951 60 01 0
F +49 2951 60 01 23
buerensales@schaffner.com

Italy

Schaffner EMC S.r.l.
Via Galileo Galilei 47
20092 Cinisello Balsamo (MI)
T +39 02 66 04 30 45/47
F +39 02 61 23 943
italysales@schaffner.com

Japan

Schaffner EMC K.K.
1-32-12, Kamiyama, Setagaya-ku
7F Mitsui-seimei Sangenjaya Bldg.
154-0011 Tokyo
T +81 3 5712 3650
F +81 3 5712 3651
japansales@schaffner.com
<http://www.schaffner.jp>

Singapore

Schaffner EMC Pte Ltd.
Blk 3015A Ubi Road 1
05-09 Kampong Ubi Industrial Estate
408705 Singapore
T +65 6377 3283
F +65 6377 3281
singaporesales@schaffner.com

Spain

Schaffner EMC España
Calle Caléndula 93, Miniparc III, Edificio E
El Soto de la Moraleja Alcobendas
28109 Madrid
T +34 618 176 133
spainsales@schaffner.com

Sweden

Schaffner EMC AB
Turebergstorg 1, 6
19147 Sollentuna
T +46 8 5792 1121 / 22
F +46 8 92 96 90
swedensales@schaffner.com

Switzerland

Schaffner EMV AG
Nordstrasse 11
4542 Luterbach
T +41 32 6816 626
F +41 32 6816 641
sales@schaffner.ch

Taiwan R.O.C.

Schaffner EMV Ltd.
6 Floor, No. 413
Rui Guang Road
114 Neihu District Taipei City
T +886 2 87525050
F +886 2 87518086
taiwansales@schaffner.com

Thailand

Schaffner EMC Co. Ltd.
Northern Region Industrial Estate
67 Moo 4 Tambon Ban Klang Amphur Muangng
P.O. Box 14
51000 Lamphun
T +66 53 58 11 04
F +66 53 58 10 19
thailandsales@schaffner.com

UK

Schaffner Ltd.
5 Ashville Way
Molly Millars Lane Wokingham
RG41 2PL Berkshire
T +44 118 9770070
F +44 118 9792969
uksales@schaffner.com
<http://www.schaffner.uk.com>

USA

Schaffner EMC Inc.
52 Mayfield Avenue
08837 Edison
T 1-800-367-5566
T 732-225-9533
F 732-225-4789
usasales@schaffner.com
<http://www.schaffner.com/us>